
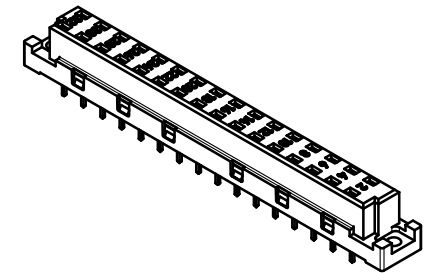


Lötanschluss  $0,6 \times 0,6$  / solder terminal  $0,6 \times 0,6$   
 Isolierwerkstoff / housing material: PBT GF 30  
 Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles  
 Bauart 7 / type 7

Leiterplatten-Layout Vorschlag  
 PCB-Layout proposal

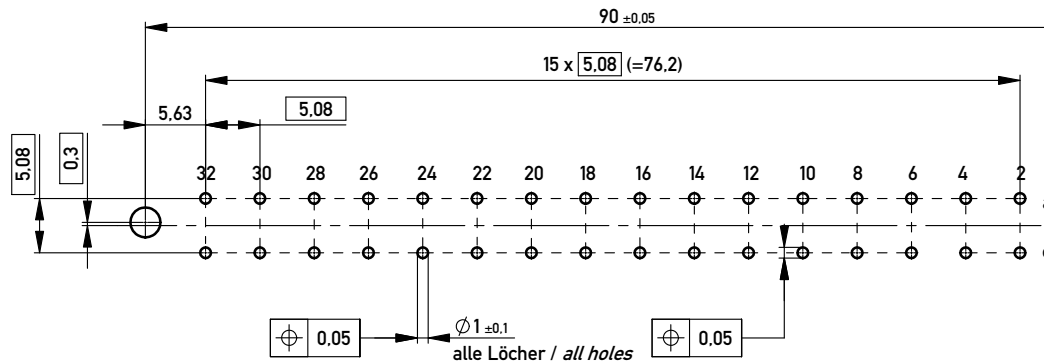

Information:	Tolerances	All Dimensions in mm	Scale 2:1
	All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		
www.ERNI.com	Subject to modification without prior notice. Drawing will not be updated.		Designation
			<b>Federleiste D 32 Löt</b> <b>Fem Connector D 32 Solder</b>
a	07.05.2013		354647
Index	Date		1 A3
Class			STVD

Fehlende Masse und Angaben nach DIN EN 60603-2 / Missing information and dimensions according to DIN EN 60603-2  
 Sonstige Angaben siehe Fertigungsunterlagen / Additional indications please see the production documentation

Copyright by ERNI GmbH  
 Proprietary notice pursuant to ISO 9006 to be observed.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[354647](#) [354647-E](#)